



# PALSUN®

A Family of Flat Solid PC Sheet Products



CONSTRUCTION




ARCHITECTURAL



SIGN & DISPLAY



FABRICATION

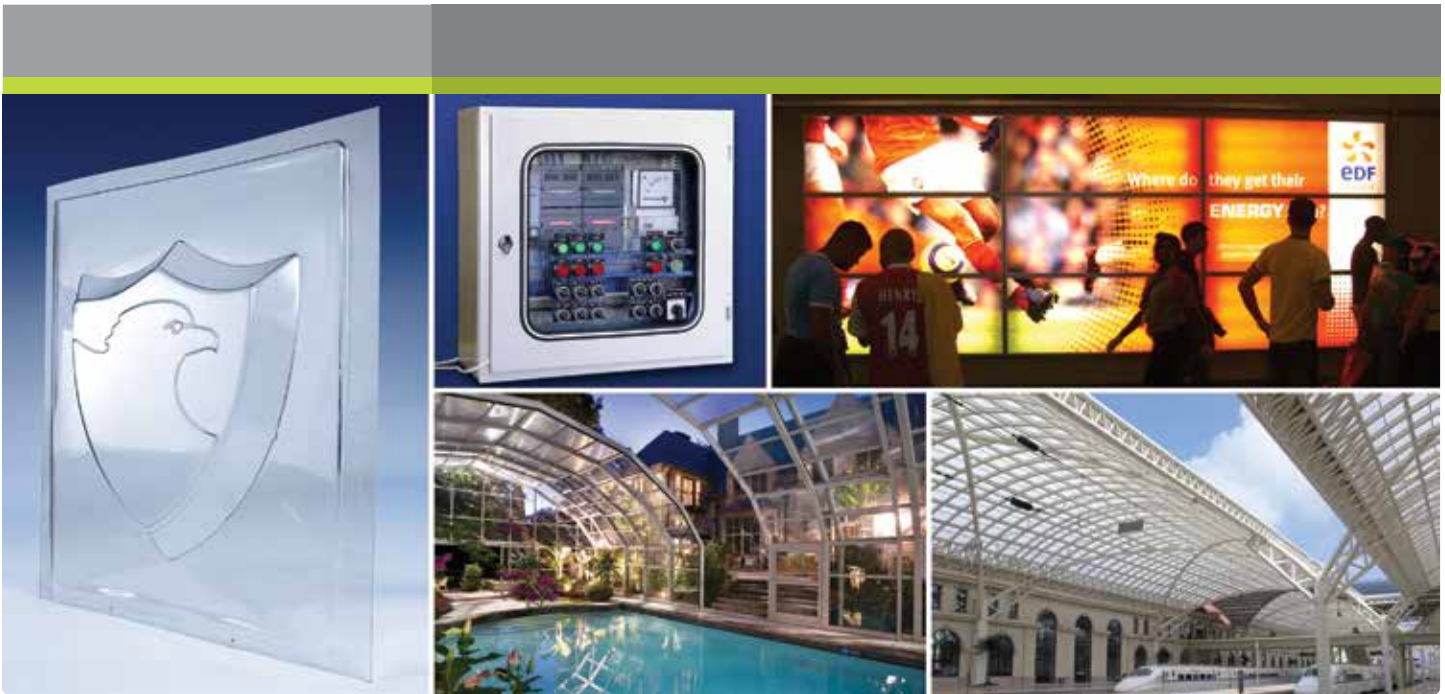

## Overview

The PALSUN family of flat solid polycarbonate product includes: Basic, UV-Protected, and Specialty Sheets. Palsun offers glass-like clarity at less than half the weight of glass, combined with unmatched impact resistance.

PALSUN can be cold bent, fabricated or formed, making it ideal for applications such as sign faces, barrel vault roofing, roof skylights, architectural roofing and glazing. Clear, translucent or opaque, PALSUN sheets are also ideal as machine guards, sound barriers, and safety glazing.

[www.PalramAmericas.com](http://www.PalramAmericas.com)

## Main Benefits

- High impact resistance—virtually unbreakable
- High clarity and light transmission
- Wide service temperature range
- Good acoustical insulation
- Lightweight
- Easy to handle and install
- Versatile, formable, and machinable
- UV and Specialty Sheet Series products offer exceptional weather and UV resistance



## Typical Applications

### ■ BASIC SERIES (NO UV)

- Interior safety glazing & machine guards
- Fabricated parts
- POP Displays


### ■ UV SERIES (W/UV PROTECTION)

- Exterior flat & thermoformed sign faces
- Skylights and architectural glazing
- Outdoor enclosures such as bus stops

### ■ SPECIALTY SHEET SERIES (GENERALLY W/UV)

- Windshields for golf carts and low speed vehicles
- Glazing in boats, trains, buses, military vehicles, and planes

*For additional protection in these applications, consider PALGARD®, a PALSUN polycarbonate substrate with an abrasion resistant coating.*

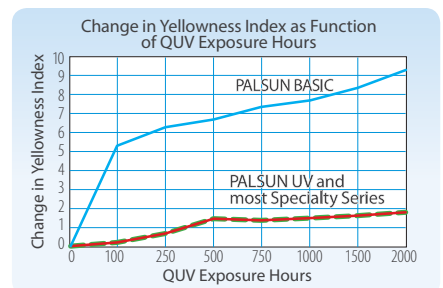

# PALSUN® Family of Products

## PALSUN® Product Range

All products shown are flat solid polycarbonate sheet.

Product	Description
<b>BASIC</b> PALSUN® Basic™	UV stabilized general purpose polycarbonate sheet
PALSUN® UV1	Co-extruded UV protection on one side for exterior applications
PALSUN® UV2	Co-extruded UV protection on both sides for exterior applications
PALSUN® Embossed*	Embossed surface (E102, prismatic, hair cell)
PALSUN® FR*	Fire retardant, with higher fire resistant rating
PALSUN® Matte*	Matte finish on one side
PALSUN® SG White	High diffusion for sign grade applications
PALSUN® CS	Coil stock on rolls ( <i>Clear and SG White standard</i> )
PALSUN® Foam	Flat foamed polycarbonate sheet, UV protected on one side
PALSUN® Solar Control*	Efficient heat-blocking with metallic appearance
PALSUN® Smart*	See-through sheet with advanced heat-blocking
<b>SPECIALTY</b> PALSUN® Basic FR†	Fire retardant, with elevated Relative Thermal Index (RTI) values.
PALSUN® OG	Optical grade sheet
PALGARD®	Abrasion resistant on one or both sides
PALGARD® TG	Transportation grade ( <i>meets specific transportation codes</i> )
PALSHIELD™	Containment and bullet resistant glazing

\* With co-extruded UV protection on one or both sides.

† Available in 2mm and 2.36mm for applications without direct UV exposure.

## Colors

### Transparent



### Translucent



### Opaque



\* Significant minimum order requirements may apply for some colors listed. Custom colors available upon request; please contact your Palram representative or agent for additional details and minimums.

## Protective Masking

Depending on product selected, clear, white or printed plastic masking protects Palsun sheet during storage and transportation. Masking must be removed from both sides immediately after installation.



## PALRAM AMERICAS

9735 Commerce Circle  
Kutztown, PA, 19530 USA  
Tel: 800.999.9459  
palramamericas@palram.com



Authorized Distributor

Inasmuch as PALRAM Industries has no control over the use to which others may put the material, it does not guarantee that the same results as those described herein will be obtained. Each user of the material should make his own tests to determine the material's suitability for his own particular use. Statements concerning possible or suggested uses of the materials described herein are not to be construed as constituting a license under any PALRAM Industries patent covering such use or as recommendations for use of such materials in the infringement of any patent. PALRAM Industries or its distributors cannot be held responsible for any losses incurred through incorrect installation of the material. In accordance with our company policy of continual product development you are advised to check with your local PALRAM Industries supplier to ensure that you have obtained the most up to date information.

©1997-2018 PALRAM Industries Ltd. | PALSUN is a trademark of PALRAM Industries Ltd.

## Regulatory Code Compliance Certification

The information listed below is product-specific.

Organization	Standard	Classification
UL	SAM File #E336663	Rigid Sign Face Material
UL	UL972	Pass
Miami Dade County	NOA # 18-0328.02	Approved Plastic
ANSI	Z97.1-09 Z87.1-15	Impact and Weathering (Impact and Optical)***
ICC	IBC Section 2606.4 IBC Section 803.1	Light Trans. Plastic Interior Finish
CCMC	NBC 2015 (Canopy Covering)	Compliant (CCMC Eval. Rep. 13450-R)
Flammability Related Compliance Certifications		
UL	CAN / ULC-S102.2-07	Class A*
UL	File e221255	V-2
ASTM	D-635 E-84	CC1 (AEB <1") Class B**
ASTM	D-2843	Smoke Density <75***
FAA	FAR 25.853(a)	Pass***
ASTM	D-2863-87	L.O.I. = 30
UL	UL 94	V-0
AU	1530.3-1982	Ignitability Index = 9 Spread of Flame Index = 8 Heat Evolved Index = 10 Smoke Developed Index = 8

\* .177" thru .50".

\*\* .040 (1mm) thickness available with Class A rating.

\*\*\* Depends on thickness.

## Dimensions

Typical Width (in.) x Length (in.)	Thickness (in.)	Custom* Width (in.) x Length (in.)	Thickness (in.)
48" x 96" - all thicknesses	.03" to .50"	Run to size	.03" to .67"
60" x 96" - all thicknesses			
72" x 96" - all thicknesses			
80" x 120" - all thicknesses			

\* Call to discuss minimum order requirements.

## Physical Properties

For detailed information on PALSUN® physical properties please visit: [www.PalramAmericas.com/Palsun](http://www.PalramAmericas.com/Palsun).

